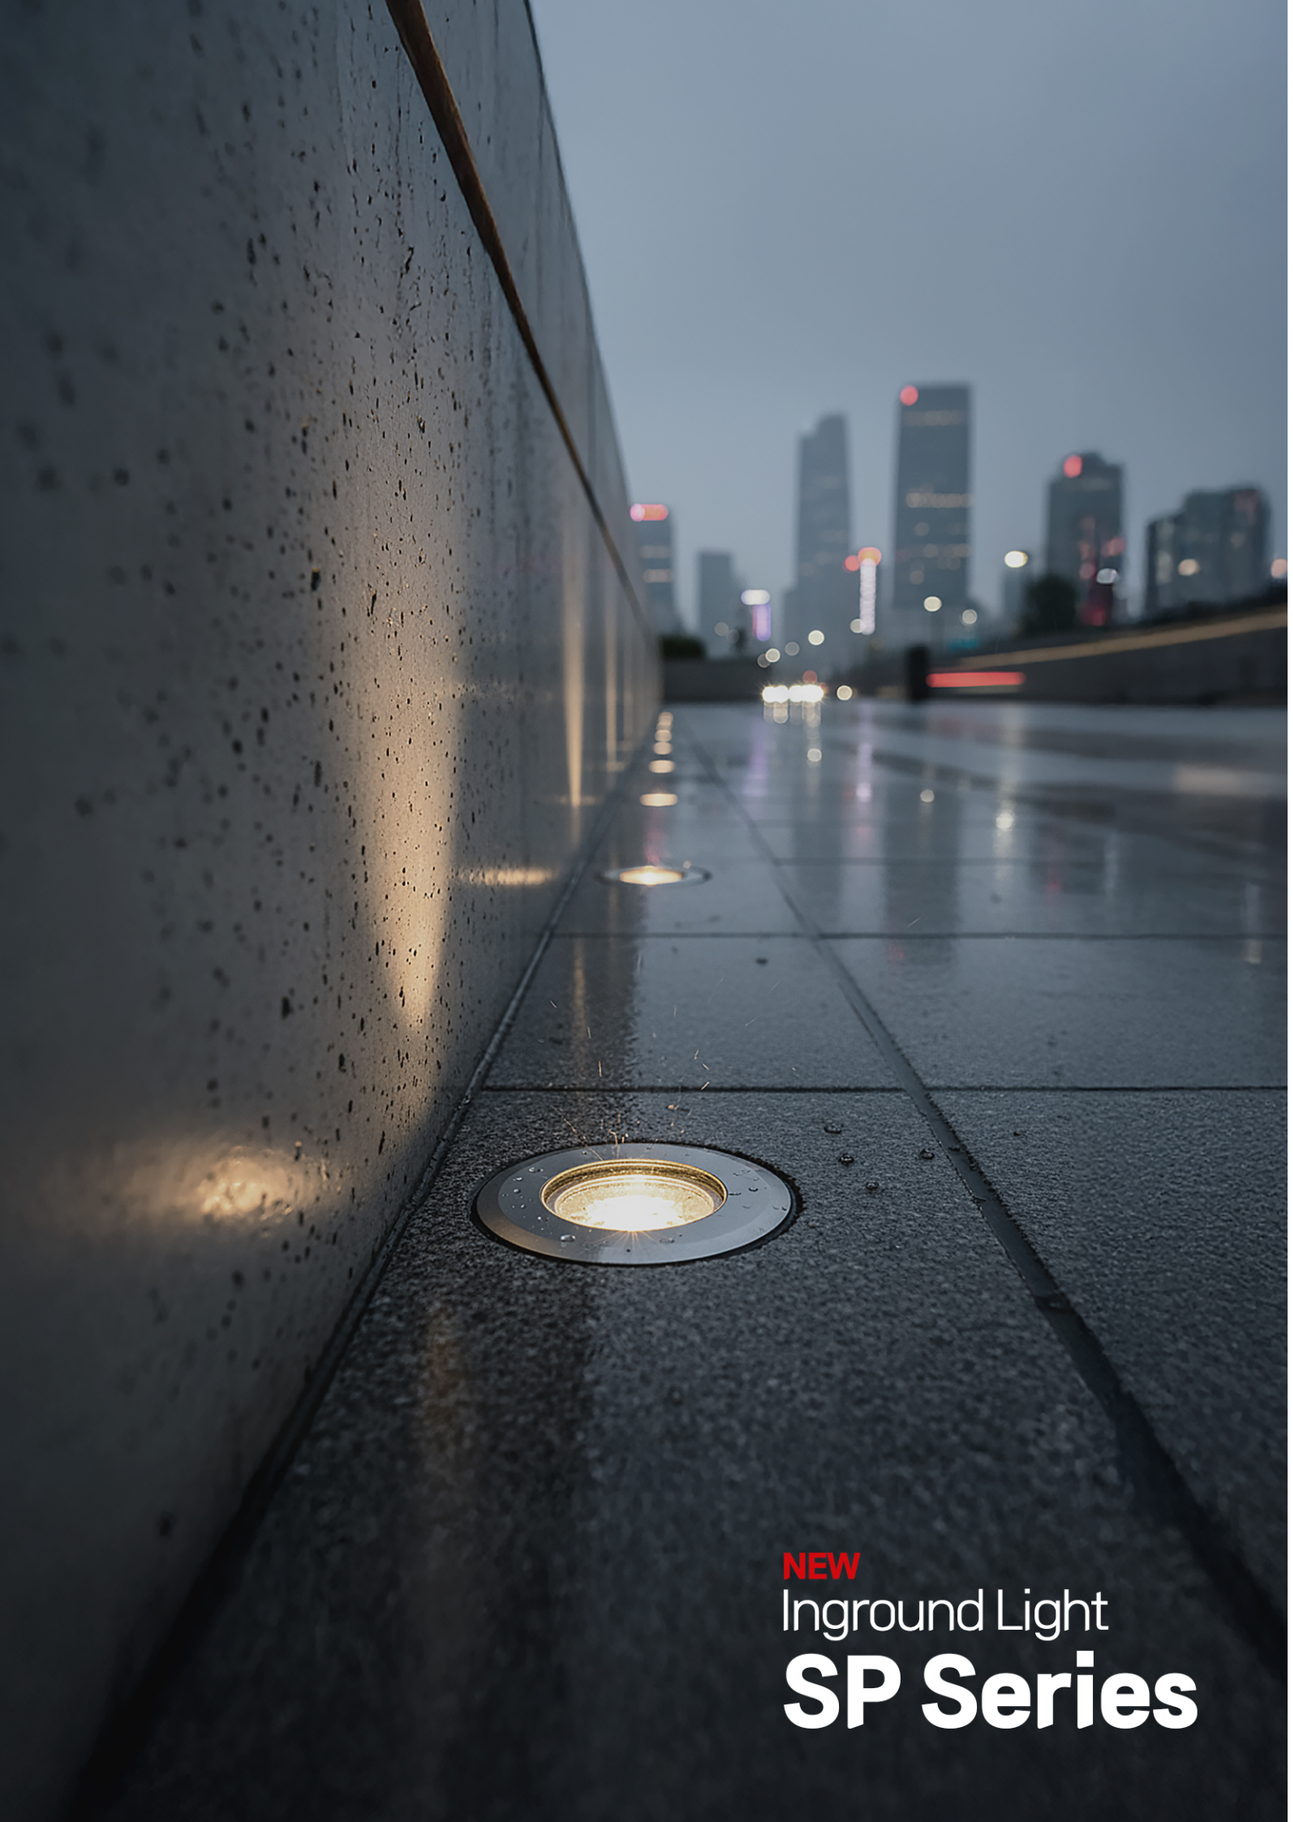

SP-55

SPECIFICATION

BODY METERIAL	Stainless Steel & AL, Die casting
COVER METERIAL	Tempered glass
SOURCE	LED
POWER [W]	3W
COLOR TEMPERATURE	3000K, 6000K, R,G,B or RGB LED chip
INPUT VOLTAGE [V]	Single 24 Vdc or 220 Vac | RGB 24 Vdc
POWER SUPPLY	External constant voltage SMPS | Built-in constant voltage SMPS Controller and constant voltage driver installation required
LUMEN [lm]	150 lm
IP RATING	IP65

DRAWING

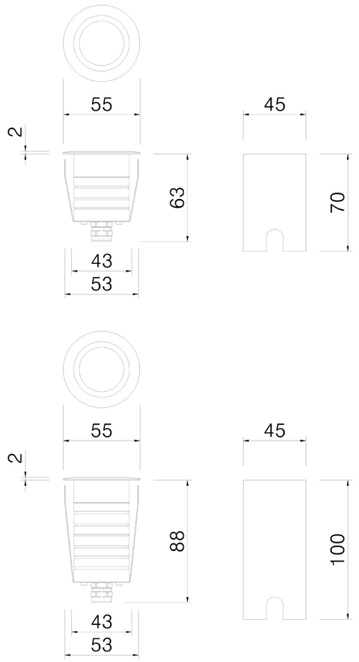

BEAM ANGLE

38°

ACCESSORY

Aluminium Housing

OPTICAL FITTINGS

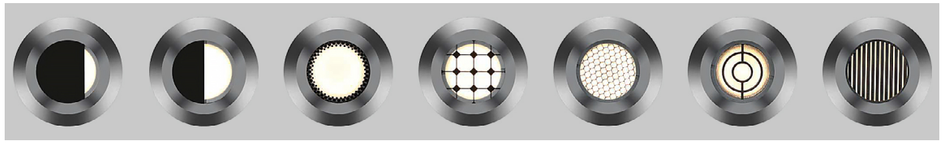

SP-62

SPECIFICATION

BODY METERIAL	Stainless Steel & AL, Die casting
COVER METERIAL	Tempered glass
SOURCE	LED
POWER [W]	6W
COLOR TEMPERATURE	3000K, 6000K, R,G,B or RGB LED chip
INPUT VOLTAGE [V]	Single 24 Vdc or 220 Vac | RGB 24 Vdc
POWER SUPPLY	External constant voltage SMPS | Built-in constant voltage SMPS Controller and constant voltage driver installation required
LUMEN [lm]	450 lm
IP RATING	IP65

DRAWING

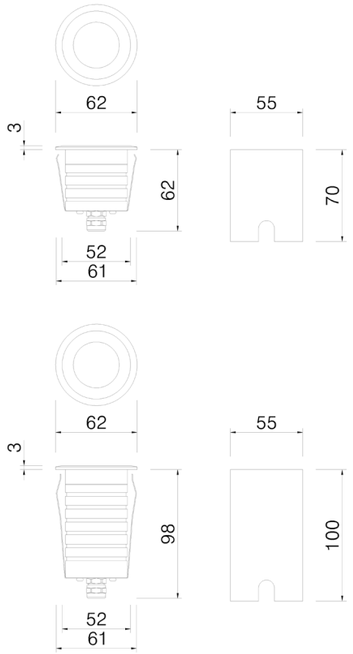

BEAM ANGLE

38°

ACCESSORY

Aluminium Housing

OPTICAL FITTINGS

SP-85

SPECIFICATION

BODY METERIAL	Stainless Steel & AL, Die casting
COVER METERIAL	Tempered glass
SOURCE	LED
POWER [W]	9W
COLOR TEMPERATURE	3000K, 6000K, R,G,B or RGB LED chip
INPUT VOLTAGE [V]	Single 24 Vdc or 220 Vac | RGB 24 Vdc
POWER SUPPLY	External constant voltage SMPS | Built-in constant voltage SMPS Controller and constant voltage driver installation required
LUMEN [lm]	675 lm
IP RATING	IP65

DRAWING

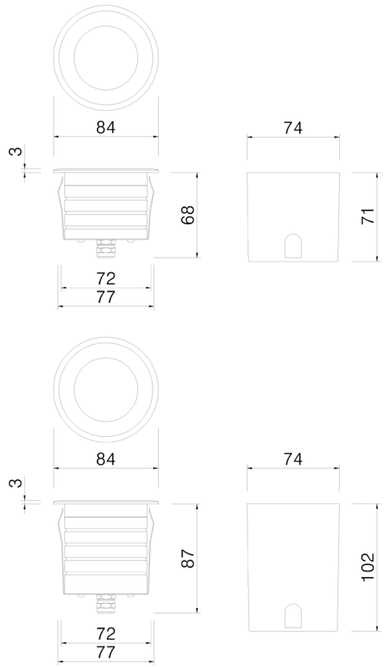

BEAM ANGLE

38°

ACCESSORY

Aluminium Housing

OPTICAL FITTINGS